



CST6206

300mA Low Power LDO

Features

- Low power consumption
- Low voltage drop
- Low temperature coefficient
- Low Quiescent Current: 3uA at 6V
- Output voltage accuracy: tolerance $\pm 2\%$

Applications

- Battery-powered equipment
- Reference voltage sources
- Cameras, video cameras
- Portable AV systems
- Mobile phones
- Portable games


General Description

6206 series are a highly precise, lower consumption, 3 terminal, positive voltage regulators manufactured using CMOS and laser trimming technologies. The series provides large currents with a significantly small dropout voltage.

The 6206 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error correction circuit. The series is

compatible with low ESR ceramic capacitors. The current limiter's foldback circuit operates as a short circuit protection as well as the output current limiter for the output pin. Output voltages are internally by laser trimming technologies. It is selectable in 0.1V increments within a range of 1.2V to 5.0V. 6206 series are available in SOT-23, SOT23-3 and SOT-89 packages.

Typical Application

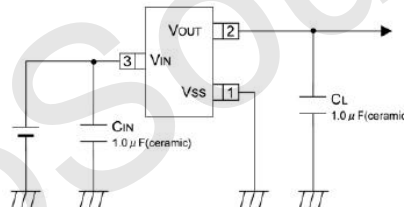

Order Information

6206-①②③④

| Designator | Symbol | Description |
|------------|---------|--------------------------|
| ①② | Integer | Output Voltage(1.2~5.0V) |
| ③ | N | Package:SOT23 |
| | M | Package:SOT23-3 |
| | P | Package:SOT89A |
| | P1 | Package:SOT89B |
| ④ | R | RoHS / Pb Free |
| | G | Halogen Free |


Note: "①②" stands for output voltages. Other voltages can be specially customized



CST6206


300mA Low Power LDO

Block Diagram

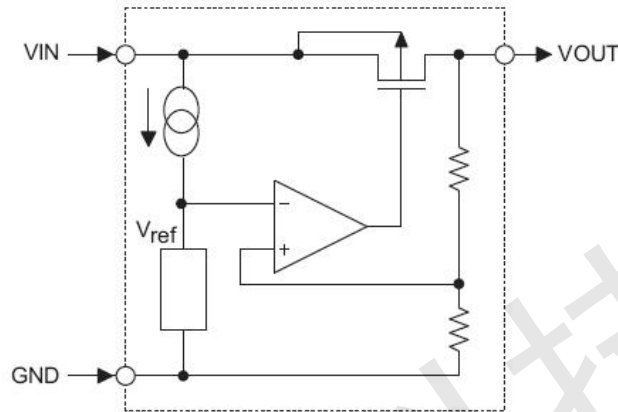


Pin Assignment


SOT23-3 and SOT23 (Top view)

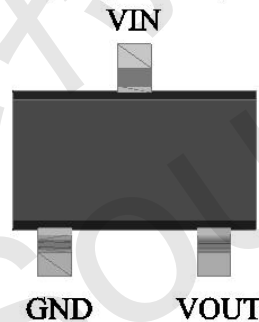

SOT89 A (Top view)

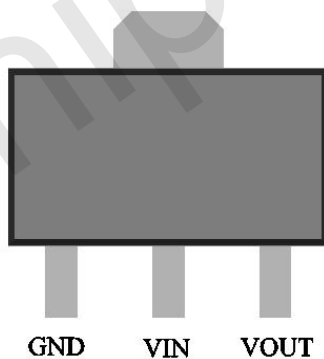

SOT89 B (Top view)

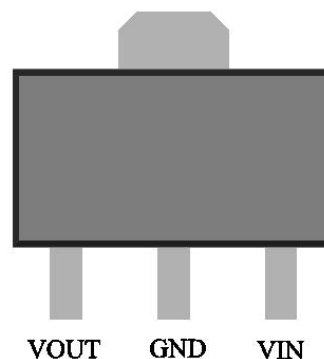





CST6206

300mA Low Power LDO

Marking Rule

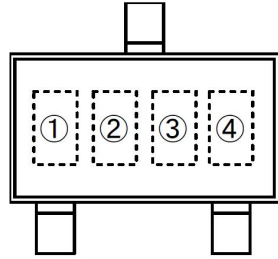

SOT-23
(TOP VIEW)

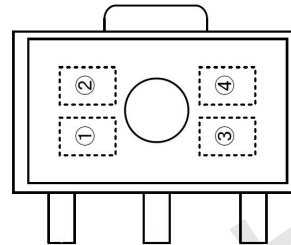

SOT-89
(TOP VIEW)

① represents product number

| MARK | PRODUCT SERIES |
|------|----------------|
| 6 | 6206**** |

② represents 3 pins regulator

| MARK | | PRODUCT SERIES |
|------------------|-------------------|----------------|
| VOLTAGE=0.1~3.0V | VOLTAGE=3.1V~6.0V | |
| 5 | 6 | 6206 |

③ represents output voltage

| MARK | VOLTAGE(V) | | MARK | VOLTAGE(V) | | | |
|------|------------|-----|------|------------|-----|-----|---|
| 0 | - | 3.1 | - | F | 1.6 | 4.6 | - |
| 1 | - | 3.2 | - | H | 1.7 | 4.7 | - |
| 2 | - | 3.3 | - | K | 1.8 | 4.8 | - |
| 3 | - | 3.4 | - | L | 1.9 | 4.9 | - |
| 4 | - | 3.5 | - | M | 2.0 | 5.0 | - |
| 5 | - | 3.6 | - | N | 2.1 | - | - |
| 6 | - | 3.7 | - | P | 2.2 | - | - |
| 7 | - | 3.8 | - | R | 2.3 | - | - |
| 8 | - | 3.9 | - | S | 2.4 | - | - |
| 9 | - | 4.0 | - | T | 2.5 | - | - |
| A | - | 4.1 | - | U | 2.6 | - | - |
| B | 1.2 | 4.2 | - | V | 2.7 | - | - |
| C | 1.3 | 4.3 | - | X | 2.8 | - | - |
| D | 1.4 | 4.4 | - | Y | 2.9 | - | - |
| E | 1.5 | 4.5 | - | Z | 3.0 | - | - |

④ X



CST6206

300mA Low Power LDO

Absolute Maximum Ratings

| Parameter | Symbol | Ratings | Units | |
|-----------------------------|-----------|------------------------------|-------|---|
| Input Voltage | V_{IN} | 8 | V | |
| Output Current | I_{OUT} | 300* | mA | |
| Output Voltage | V_{OUT} | $V_{SS}-0.3 \sim V_{IN}+0.3$ | V | |
| Power Dissipation | SOT-23 | P_d | 0.20 | W |
| | SOT23-3 | | 0.25 | W |
| | SOT-89 | | 0.50 | W |
| | USP-6B | | 0.10 | W |
| | TO-92 | | 0.50 | W |
| Operating Temperature Range | T_{opr} | -40~+85 | °C | |
| Storage Temperature Range | T_{stg} | -55~+125 | °C | |

* $I_{OUT}=P_d/(V_{IN}-V_{OUT})$

Electrical Characteristics

6206 for any output voltage

($T_a=25^\circ\text{C}$)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|--------------------------------------|---|-----------------------|-----------|-----------------------|--------|
| Output Voltage | V_{out} | $V_{in}=V_{out}+1V$ $1.0\text{mA} \leq I_{out} \leq 30\text{mA}$ | $V_{out} \times 0.98$ | -- | $V_{out} \times 1.02$ | V |
| Output Current*1 | I_{out} | $V_{in}-V_{out}=1V$ | -- | 300 | -- | mA |
| Low dropout*2 | V_{drop} | Refer to the next table | | | | |
| Line Regulation | $\Delta V_{out1}/(V_{in}-V_{out})$ | $1.6V \leq V_{in} \leq 8V$ $I_{out}=40\text{mA}$ | -- | 0.05 | 0.2 | %/V |
| Load Regulation | $\Delta V_{out} / \Delta I_{out}$ | $V_{in}=V_{out}+1V$ $1.0\text{mA} \leq I_{out} \leq 80\text{mA}$ | -- | 12 | 30 | mV |
| Output voltage Temperature Coefficiency | $\Delta V_{out}/(T_a \cdot V_{out})$ | $I_{out}=30\text{mA}$ $0^\circ\text{C} \leq T_a \leq 70^\circ\text{C}$ | -- | ± 100 | -- | Ppm/°C |
| Supply Current | I_{ss} | -- | -- | 3 | 5 | uA |
| Input Voltage | V_{in} | -- | -- | 6 | 8 | V |
| PSRR | PSRR | $F=1\text{KHz}$ $V_{in}=V_{out}+1V$ | -- | 50 | -- | dB |
| Output Noise | EN | $BW=10\text{Hz} \sim 100\text{KHz}$ | -- | 30 | -- | uVrms |



CST6206


300mA Low Power LDO

Electrical Characteristics by Output Voltage:


| Output Voltage Vout(V) | Dropout Voltage Vdif (V) | | |
|------------------------|--------------------------|------|------|
| | Conditions | Typ. | Max. |
| Vout≤1.5V | Iout=100 mA | 0.35 | 0.57 |
| 1.8 ≤ Vout ≤ 2 | | 0.28 | 0.42 |
| 2.8 ≤ Vout ≤ 5.0 | | 0.19 | 0.35 |

Typical Performance Characteristics

(1) Output Voltage vs Input voltage and Output Voltage vs. Output Current and Input Transient Response

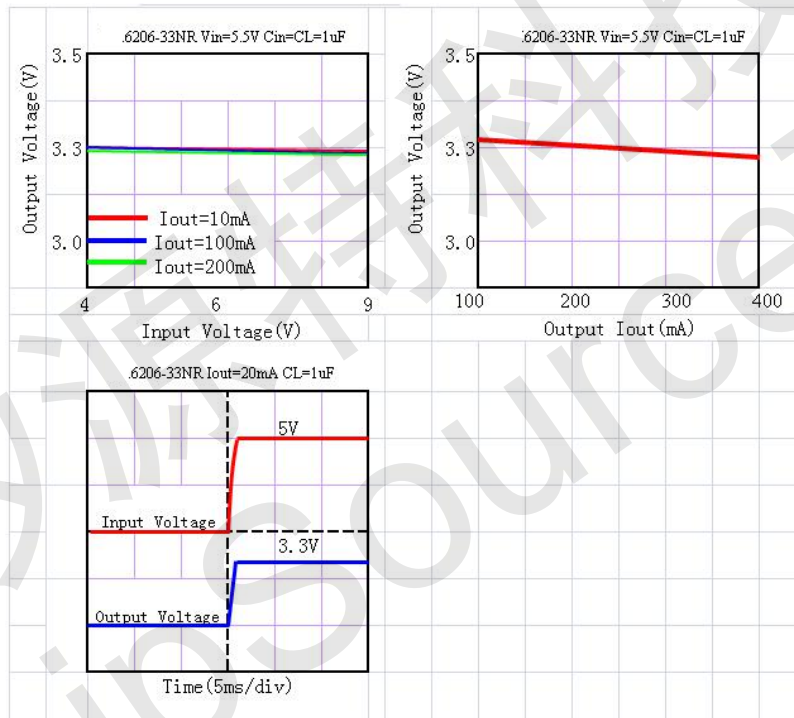

(2) Output Voltage vs. Ambient Temperature

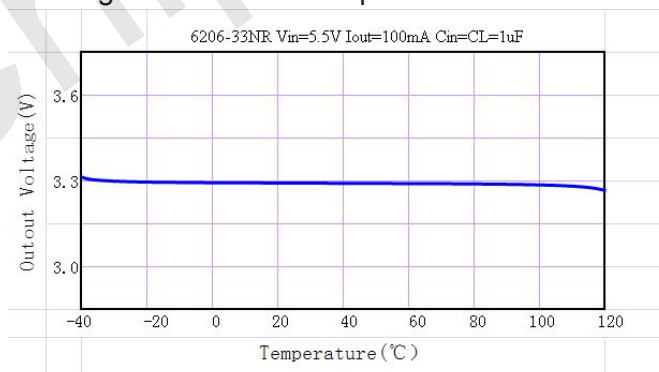




CST6206

300mA Low Power LDO

Package Information

3-pin SOT23 Outline Dimensions

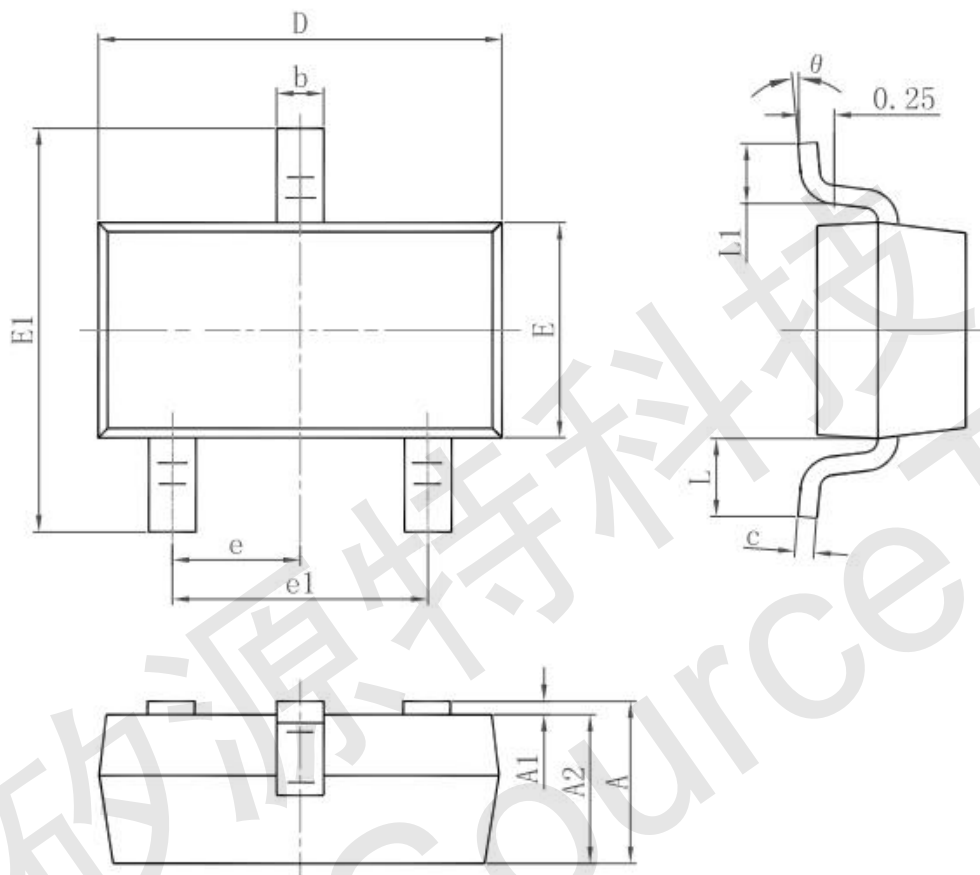


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|----------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.900 | 1.150 | 0.035 | 0.045 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.900 | 1.050 | 0.035 | 0.041 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.080 | 0.150 | 0.003 | 0.006 |
| D | 2.800 | 3.000 | 0.110 | 0.118 |
| E | 1.200 | 1.400 | 0.047 | 0.055 |
| E1 | 2.250 | 2.550 | 0.089 | 0.100 |
| e | 0.950 TYP. | | 0.037 TYP. | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.550 REF. | | 0.022 REF. | |
| L1 | 0.300 | 0.500 | 0.012 | 0.020 |
| θ | 0° | 8° | 0° | 8° |



CST6206

300mA Low Power LDO

3-pin SOT23-3 Outline Dimensions

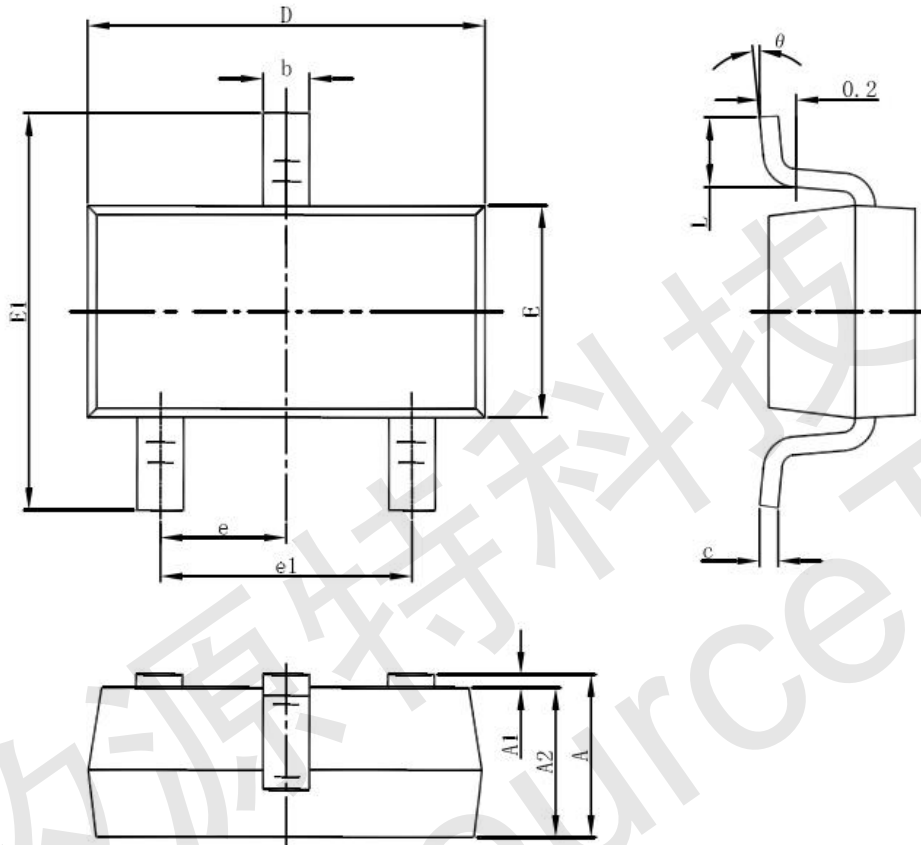


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |



CST6206

300mA Low Power LDO

3-pin SOT89 Outline Dimensions

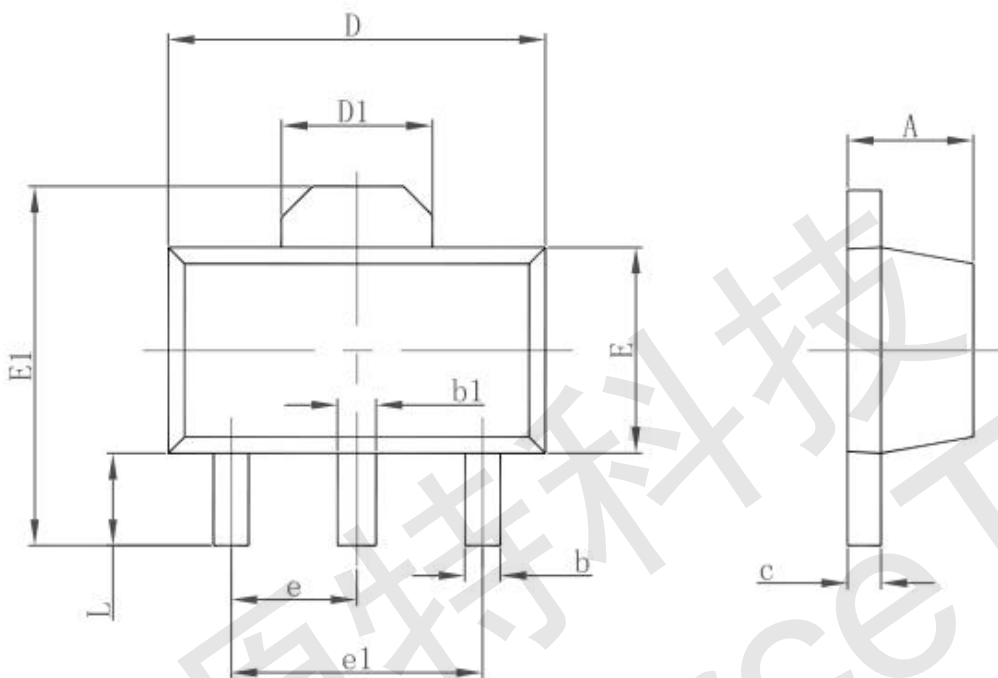

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.400 | 1.600 | 0.055 | 0.063 |
| b | 0.320 | 0.520 | 0.013 | 0.020 |
| b1 | 0.400 | 0.580 | 0.016 | 0.023 |
| c | 0.350 | 0.440 | 0.014 | 0.017 |
| D | 4.400 | 4.600 | 0.173 | 0.181 |
| D1 | 1.550 REF. | | 0.061 REF. | |
| E | 2.300 | 2.600 | 0.091 | 0.102 |
| E1 | 3.940 | 4.250 | 0.155 | 0.167 |
| e | 1.500 TYP. | | 0.060 TYP. | |
| e1 | 3.000 TYP. | | 0.118 TYP. | |
| L | 0.900 | 1.200 | 0.035 | 0.047 |